


Lightning

P2-HML-LIG400-03-017429



High Mast Light

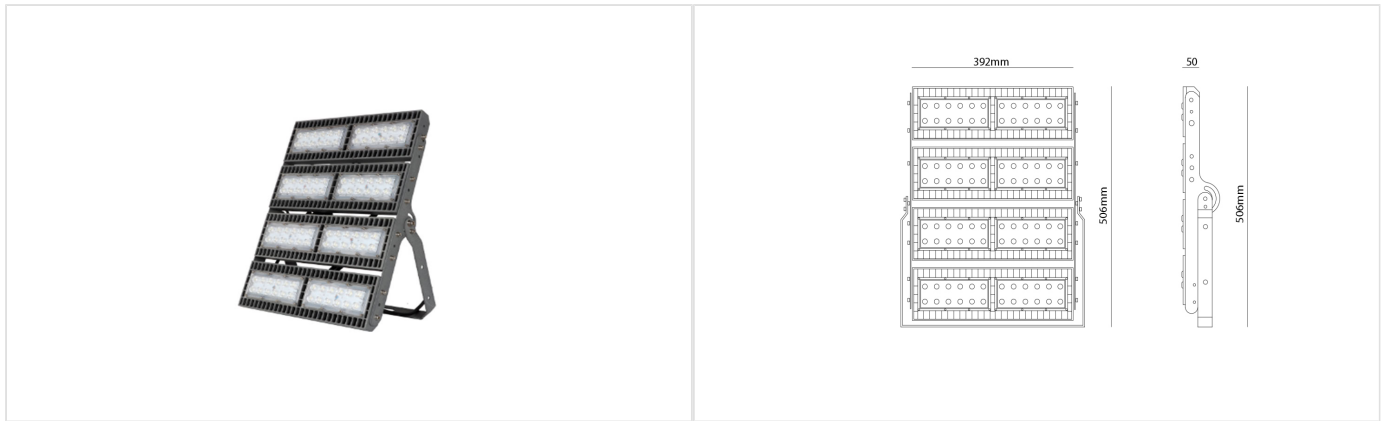

Description

Modular creative design concept, this product comes with high impact strength, high structural integrity, and better heat dissipation capability. Stability in light color and gradients. A variety of angle light transmission design to meet the different environmental needs. Lamp surface anti-aging electrostatic spray treatment, self-cleaning, strong corrosion resistance. Lightning has a slim, low profile and lightweight design, can minimize wind load requirements and an ideal replacement solution to conventional metal halide fixtures.

Product Specification

Power	400 w
Luminaire luminous flux	49400 lm
Efficiency	123.5 lm/w
CCT	4000 k
CRI	≥80
Beam Angle	30°
Power Factor	0.95
Working temperature	-40 to + 50 °C
Life span	-
IP	65
Dimension	W50 x L392 x H506

Electrical Features

Light source
Lueilwitz PLC Module – SMD
Powered By
Olson-Hermiston

Technical Features

Materials

Housing-Grey-Die-cast aluminum

Lighting Distributor

Fitting -Silver -Aluminum

Installation way

Mounted on pole

Surface

sidewall mounted

Adjustability

Rotated Horizontally 0°/180°, vertically 0°/0°

Applications

Play Areas, Sport Courts, Outdoor spaces

 Your logo

demo
佛山市顺德区