


# Gaisma

P2-DL-GAI15-02-002931



Downlight

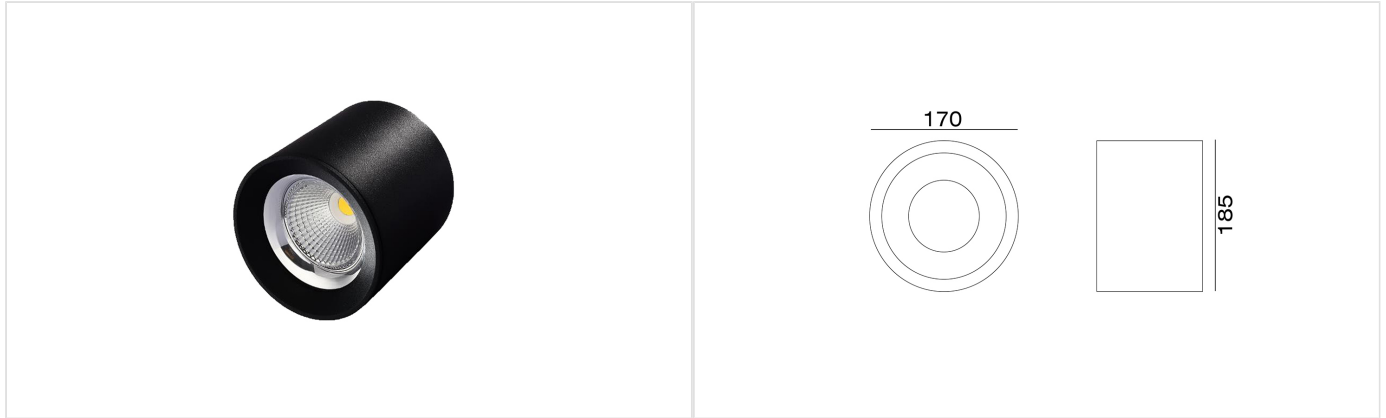

## Description

Gaisma surface downlight was created in a professional way and high-quality materials to make high-grade finishing that gives your space a modern and special touch. This surface downlight with its driver built-in, making it easy for installation and it was made with different specifications and high ingress protection reaches to IP44 that gives you a wide range of options to use in all applications you want. Gaisma surface downlight can be provided with a cable to make it pendant as a choice to match all your needs.

## Product Specification

Power	15 w
Luminaire luminous flux	1140 lm
Efficiency	76 lm/w
CCT	3000 k
CRI	≥80
Beam Angle	45°
Power Factor	0.55
Working temperature	-20 to + 50 °C
Life span	50,000 h
IP	44
Dimension	D110 x H120

## Electrical Features

Light source	Lueilwitz PLC Module – COB
Powered By	Schuster Ltd

## Technical Features

### Materials

Housing–Black–Aluminum



### Lighting Distributor

Reflector –Silver –Plastic painted



### Installation way

Socket

Surface

### Adjustability

Not Adjustable

## Applications

Offices, Warehouses, Hospitals & Clinics, Supermarkets, Schools, Showrooms, Government institutions, Restaurants



demo  
佛山市顺德区