


Shine

P2-WP-SH140-02-030729



Wallpack light

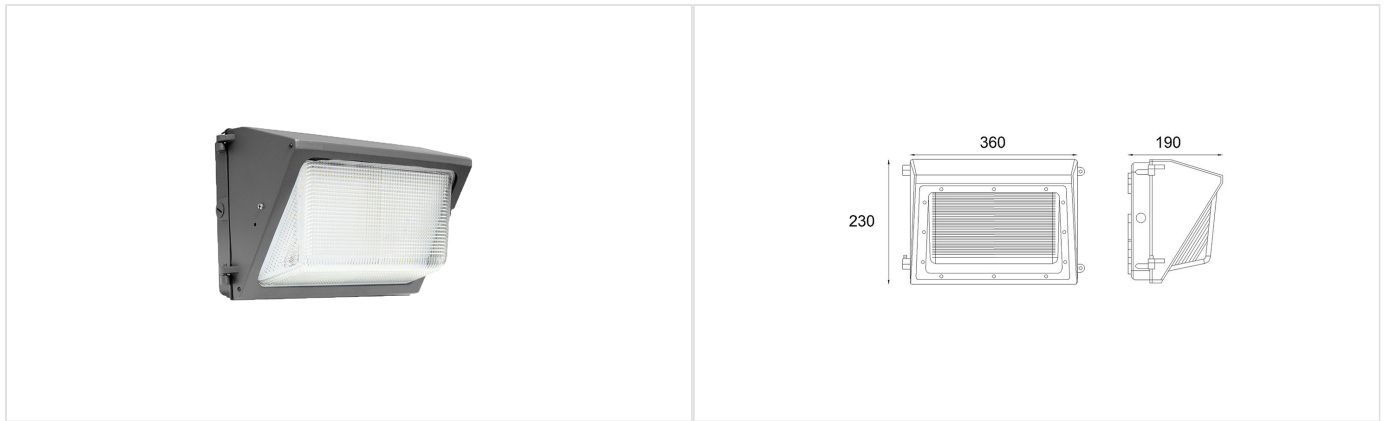

Description

Choosing wall pack lights for any facility can be hard since there are many aspects to take in consideration: light power, design, installation place, durability and resistance to harsh conditions. Shine is the multi applicable wall-pack light to use for lighting many different applications: residential commercial and industrial. With its different wattage and unique design, it provides the best functional and practical lighting when customer needs a long life, highly shock resistant light. It provides bright and clear lighting with large beam angle to cover wide area of the surface its mounted on. Light color can be warm white or cool white. Beam angle 110° – 130° wide angle, customer can choose from several power ranges according to desired lighting and size of the application.




Product Specification

Power	40 w
Luminaire luminous flux	5400 lm
Efficiency	135 lm/w
CCT	4000 k
CRI	≥80
Beam Angle	100° x 150°
Power Factor	0.95
Working temperature	-20 to + 55 °C
Life span	50,000 h
IP	65
IK	08
Dimension	W190 x L360 x H230

Electrical Features

Light source	Shanahan, Dare and Schulist Module – SMD
Powered By	Olson-Hermiston

Technical Features

Materials	
Housing–Bronze–Aluminum spray painted	
Front cover –Semi transparent–Plastic	
Lighting Distributor	
Diffuser–Semi transparent–Plastic	
Installation way	
Recessed	
Surface	
Adjustability	
Not Adjustable	

Applications

Offices, Hospitals & Clinics, Supermarkets, Schools, Showrooms, Government institutions, Restaurants, Hotel, Galleries , Fashion Stores



demo
佛山市顺德区

Accessories



GL-0091
Suspend Kit